




## LIGHTWEIGHT AND DURABLE WITH PU PALM

Ideal for precision tasks requiring dexterity and flexibility as well as for preventing product contamination. A very supple, stretchable and comfortable mechanical barrier that adapts to every movement. Protects the hand from oils, grease and abrasion, with effective grip.

### FEATURES

- › Comfortable with an anatomical shaped fit, allowing excellent freedom of movement and minimal hand fatigue
- › Abrasion resistance prolongs service life
- › Outstanding dexterity and tactility
- › Breathable back of hand designed to reduce perspiration and skin irritation
- › Lint free, reducing the risk of product contamination
- › Elasticated wrist provides a secure fit



### SUITABLE FOR


#### Typical Industries

- Automotive
- Commercial
- Construction
- Electronics
- Logistics
- Manufacturing

#### Suitable Applications

- Assembly
- Final Fix
- General Maintenance
- Quality Inspection
- Second Fix
- Surveying

### CERTIFICATION

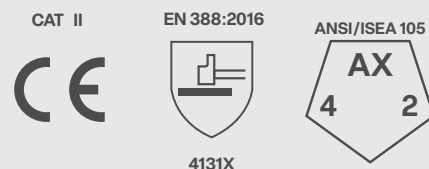

See overleaf for explanation



## PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge nylon
	COATING:	Polyurethane (PU)
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


## ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKY692	10 pairs per bag
9/L	SKY693	
10/XL	SKY694	120 pairs per case
11/XXL	SKY695	

## CERTIFICATION LEGENDS



## MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

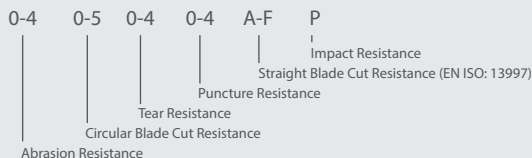

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

## ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

## ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

## GLOBUS

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

## MIDDLE EAST &amp; AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

## GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777)